What makes the **HIMACS** sheet so special

Our HIMACS sheet is the perfect basis for your ideas. For different applications and areas, there are special thicknesses and dimensions and also some special material compositions.

Sheet Material


- · HIMACS is available in different thicknesses, formats, and sizes. Perfect for maximising cuts and minimising costs. However, not all colours are available in every thickness. See the table for availability below.
- HIMACS sheet material is available in thicknesses of 4.5 mm, 6 mm, 9 mm, 12 mm and 20 mm as well as the corresponding sheet formats.

HIMACS is also available in special formulations

- HIMACS Exteria[®]: HIMACS FR Low flammability, ETA Certified, IMO Certified, Norm EN 45 545 Class R1 HZL3 for fire protection on railway vehicles.
- HIMACS UV+ Advanced UV resistance.
- HIMACS Ultra-Thermoforming: Advanced Thermoforming, up to 6 mm internal radius.
- · HIMACS Intense-Ultra: The best of two worlds Ultra-Thermoforming and Intense Colour Technology

For more information, see page 52-67.

Standard Formats

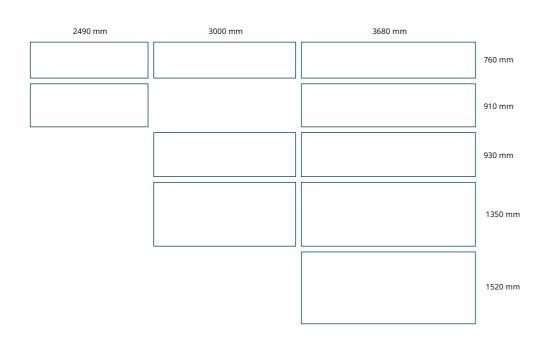

Dimensions – Sheet material

Standard Format

Standard formats are available in stock, for specific thicknesses per colour, please refer to the colour chart on page 52-67, or contact your sales representative.

SHEET THICK- NESS IN MM	SHEET LENGTH IN MM	SHEET WIDTH IN MM
4.5	3000*	930
6	2490	760
	2490*	910
	3680*	1350
9	3680	760
	3680*	910
	3680*	1350
12	3680	760
	3680*	910
	3000***	1350
	3680*	1350
	3680*	1520
20	3000	760

Ultra-Thermoforming Format

SHEET THICK- NESS IN MM	SHEET LENGTH IN MM	SHEET WIDTH IN MM
12	3680**	760
		930
		1520

Only available in S028 Alpine White.

** Only available in S928 Alpine White.*** Only available in Opal

If needed, LX Hausys Europe can produce different dimensions (as well as bespoke colours). To learn more about the conditions, please contact us at lxhausys.com/eu