
PRODUCT SPECIFICATION

The perfect basis for your ideas: our comprehensive range of sheets.

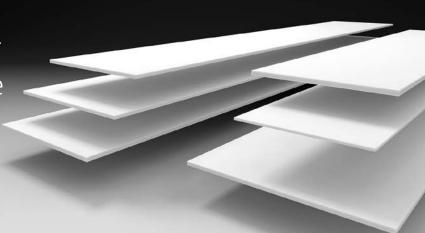

Dimensions - Sheet material

Standard Format

Standard formats are available on stock, for specific thicknesses per colour, please refer to the colour chart on page 66, or contact your sales representative.

| SHEET THICK- NESS IN MM | SHEET WIDTH IN MM | SHEET LENGTH IN MM |
|----------------------------|----------------------|-----------------------|
| 4.5 | 930 | 3000 * |
| 6 | 760 | 2490 |
| | 910 | 2490 * |
| | 1350 | 3680 * |
| 9 | 760 | 3680 |
| | 910 | 3680 * |
| | 1350 | 3680 * |
| 12 | 760 | 3680 |
| | 910 | 3680 * |
| | 1350 | 3680 * |
| | 1520 | 3680 * |
| 20 | 760 | 3000 |

Ultra-Thermoforming Format

| SHEET THICK- NESS IN MM | SHEET WIDTH IN MM | SHEET LENGTH IN MM | |
|----------------------------|----------------------|-----------------------|--|
| | 760 | | |
| 12 | 930 | 3680 ** | |
| | 1520 | | |

- * Only available in S028 Alpine White.
- ** Only available in S928 Alpine White.

Special Format

Special format available on special request, minimum quantities apply. For further special formats, please contact your sales representative.

| SHEET THICK- NESS IN MM | SHEET WIDTH IN MM | SHEET LENGTH IN MM | COLOURS AVAILABLE |
|----------------------------|----------------------|--------------------------------|---|
| 4.5 | 930 | 3000 | Solid |
| 6 9 12 | 910 | 2200 ~ 3680 Flexible length | Solid, Granite, Lucent and Ultra-Thermoforming |
| | 1350 | 2200 ~ 3680 Flexible length | Solid, Granite |
| | 1520 | 2200 ~ 3680 Flexible length | Solid, Granite, Lucent |
| 20 | 760 | 2200 ~ 3680 Flexible length | Solid, Granite, Lucia |

Sheet Material

- HIMACS is available in different thicknesses, formats and sizes. Perfect for maximum cutting and minimal costs. However, not all colours are available in every thickness.
 See the table for availability below.
- HIMACS sheet material is available in thicknesses of 4.5 mm, 6 mm, 9 mm, 12 mm and 20 mm as well as the corresponding sheet formats.

HIMACS is also available in special formulations:

• HIMACS Exteria®

HIMACS FR – Low flammability, ETA Certified, IMO Certified, Norm EN 45 545 Class R1 HZL3 for fire protection on railway vehicles.

HIMACS UV+ - Advanced UV resistance, CSTB Certified.

- HIMACS Ultra-Thermoforming: Advanced Thermoforming, up to 6 mm internal radius.
- **HIMACS Intense-Ultra:** The best of two worlds Ultra-Thermoforming and Intense Colour Tecnology

For more information, see page 69.

